



PC industriels sur mesure

Le savoir-faire français au service de vos projets



Sommaire



PanelPC Industriel ————03

- Boîtier en alliage d'aluminium
- De 10.1 à 32 pouces
- Capactif ou Résistif
- Face avant étanche IP66



PC embarqué ————13

- Fixation Murale
- Montage sur rail DIN
- Étanche IP66 / IP69K



PanelPC Industriel Etanche —07

- SUS304 / SUS316
- Alliage d'aluminium en option
- De 10.1 à 32 pouces
- Capactif ou Résistif
- Étanche IP66 / IP69K




Moniteur industriel ————16

- Boîtier en alliage d'aluminium
- De 10.1 à 24 pouces
- Capactif ou Résistif
- Face avant étanche IP66/IP69K



Panneau de contrôle ————11

- Boîtier en alliage d'aluminium
- Disponible en 15.6, 17 et 21.5 pouces
- Face avant étanche IP66



Personnalisation ————19

- Certifications ————20
- Accessoires ————20
- Solutions ————21



PanelPC Industriel



Intel® Celeron® J1900
Ecran Capacitif PCAP / Résistif (Option)



LCD Size: 10.1" / 12.1" / 13.3" / 15" / 15.6" / 17" / 17.3" / 18.5" / 19" / 21.5" / 23.8" (Optional)

IP66 protection

TPM2.0

-20 C ~70 C

OVP / OCP / RPP

7/24 Working

Wide Voltage
9V~36V

Anti-static
8KV~15KV

Low Power
Consumption

Fanless design

System	CPU	Intel® Bay Trail Celeron J1900 Quad-core 2.0GHz , TDP 10W
	L2 Cache	2MB
	System Chipset	Integrated with Intel® SoC
	Memory	1 x DDR3L 1333MHz 4GB, Up to 8GB
	Harddisk	1 x mSATA 128G SSD (250G / 500G / 1TB SSD) / 1 x 2.5" SATA
	Graphics	Intel HD Graphics
	Network	Intel® I211-AT GbE LAN
	Audio	Realtek ACL662 Audio controller
	TPM	TPM 2.0
	Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset
I/O	Operation System	Windows 7 / 8 / 10, Linux, Ubuntu
	VIDEO	1 x H-DMI
	LAN	2 x LAN (10/100/1000 Mbps)
	USB	3 x USB2.0 / 1 x USB3.0
	COM	2 x RS-232 / 422 / 485 (Adjustable through BIOS)
	Audio	1 x Audio_out & Mic_in
	Wireless Network	Optional (WiFi / Bluetooth / 4G)
Expansion	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT) 1*M.2 (Key-B, 3042, USB2.0, 4G)
	SIM Socket	1x SIM Socket

PanelPC Industriel



Intel® Celeron® J6412 / ® Atom™ X6425E
Ecran Capacitif PCAP / Résistif (Option)



LCD Size: 10.1" / 12.1" / 13.3" / 15" / 15.6" / 17" / 17.3" / 18.5" / 19" / 21.5" / 23.8" (Optional)

IP66 protection

TPM2.0

-20 C ~70 C

OVP / OCP / RPP

7/24 Working

Wide Voltage
9V~36V

Anti-static
8KV~15KV

Low Power
Consumption

Fanless design

System	CPU	Intel® Elkhart Lake Celeron J6412 2.0GHz , TDP 10W	Intel® Elkhart Lake Atom X6425E 2.0GHz , TDP 10W
	L2 Cache	1.5MB	
	System Chipset	Integrated with Intel® SoC	
	Memory	DDR4L 3200MHz 4GB, MAX 32GB	
	Harddisk	1 x M.2 120G SSD (250G / 500G / 2TB SSD) / 1 x 2.5" SATA	
	Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors	
	Network	Intel® 226-V GbE LAN	
	Audio	Realtek ACL897 Audio controller	
	TPM	TPM 2.0	
	Watchdog Timera	Software Programmable Supports 1~255 sec. System Reset	
I/O	Operation System	Windows 10 / 11, Linux, Ubuntu	
	VIDEO	1 x H-DMI	
	LAN	3 x LAN (10/100/1000/2500 Mbps)	
	USB	4 x USB 3.0	
	COM	2 x RS-232 / 422 / 485 (Adjustable through BIOS)	
	Audio	1x Audio_out & Mic_in	
	Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)	
Expansion	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT) 1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G) 1*M.2 (Key-M, 2280, SATA / SSD)	
	SIM Socket	1x SIM Socket	


PanelPC Industriel



8th/10th Gen Intel® Core™
Ecran Capacitif PCAP / Résistif (Option)



LCD Size: 10.1" / 12.1" / 13.3" / 15" / 15.6" / 17" / 17.3" / 18.5" / 19" / 21.5" / 23.8" / 31.5" (Optional)



System	CPU	8th Gen Intel® Core™ i3-8145U 2.1GHz / i7-8565U 1.8GHz		10th Gen Intel® Core™ i5-10210U 1.6GHz
	L3 Cache	4MB / 8MB		6MB
	TDP	25W		
	System Chipset	Integrated with Intel® SoC		
	Memory	2 x DDR4L 2400MHz 4GB. Up to 64GB		
	Harddisk	1 x M.2 120G SSD (250G / 500G / 2TB SSD) / 1 x mSATA		
	Graphics	Intel HD Graphics 620		
	Network	Intel® I211-AT GbE LAN		
	Audio	Realtek ACL897 Audio controller		
	TPM	TPM 2.0		
	Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset		
I/O	Operation System	Windows 10 / 11 , Linux, Ubuntu		
	VIDEO	1 x H-DMI		
	LAN	2 x LAN (10/100/1000 Mbps)		
	USB	3 x USB 3.0 / 1 x USB 2.0		
	COM	2 x RS-232 / 422 / 485 (Adjustable through BIOS)		
	Audio	1x Audio_out & Mic_in		
Expansion	Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)		
	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)		
		1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)		
	SIM Socket	1x SIM Socket		


PanelPC Industriel



12th/13th Gen Intel® Core™
Ecran Capacitif PCAP / Résistif (Option)



LCD Size: 12.1" / 15" / 15.6" / 17" / 18.5" / 19" / 21.5" / 23.8" / 31.5" (Optional)

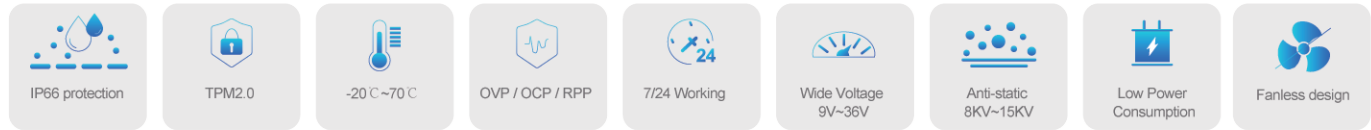

System	CPU	12th Generation Intel® Core™ i3-1215U 1.2GHz	12th Generation Intel® Core™ i5-1235U 1.3GHz	12th Generation Intel® Core™ i7-1255U 1.7GHz
	L3 Cache	10MB	12MB	12MB
	Graphics	Intel® UHD Graphics	Intel® Iris® Xe Graphics	Intel® Iris® Xe Graphics
	TDP	15W		
	System Chipset	Integrated With Intel® SoC		
	Memory	2 x DDR5 4800MHz 8GB. Up to 64GB		
	Harddisk	2 x M.2 120G SSD (250G / 500G / 2TB SSD)		
	Network	2 x Intel® I226, 2.5GbE / 1 x Intel® I219, 1GbE		
	Audio	Realtek ALC897 Audio controller		
	TPM	TPM 2.0		
	Watchdog Timer	255 Timer Levels. Set up by Software		
I/O	Operation System	Windows 10 / 11 , Linux, Ubuntu		
	VIDEO	1 x H-DMI		
	Ethernet	3 x RJ45		
	USB	4 x USB 3.2 / 1 x Type-C x 1 (USB 3.0 Gen 2, DP 1.4)		
	COM	2 x RS-232 / 422 / 485 (Adjustable through BIOS)		
	Audio	1x Audio_out & Mic_in		
Expansion	Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)		
	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)		
		1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)		
	SIM Socket	1x SIM Socket		

PanelPC Industriel Etanche



Coque en alliage d'aluminium
Ecran Capacitif PCAP / Résistif (Option)



LCD Size: 8.4" / 10.1" / 12.1" / 13.3" / 15" / 15.6" / 17" / 17.3" / 18.5" / 19" / 21.5" / 23.8" (Optional)



System	CPU	Intel® Celeron J1900 2.0GHz , TDP 10W	Intel® Celeron J6412 2.0GHz , TDP 10W	6th Gen Intel® Core i5-6200U 2.3GHz , TDP 15W
	L2 Cache	2MB	1.5MB	3MB
	Memory	1 x DDR3L 1333MHz 4GB, Up to 8GB	1 x DDR4L 3200MHz 4GB, MAX 32GB	1 x DDR4L 2133MHz 4GB, Up to 32GB
	Graphics	Intel HD Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors	Intel HD Graphics 520
	Network	Intel® 226-V GbE LAN		Intel® I211-AT GbE LAN
	Audio	Realtek ACL662 Audio controller	Realtek ACL897 Audio controller	Realtek ACL662 Audio controller
	Harddisk	1 x mSATA 128G SSD / (250G / 500G / 1TB SSD) / 1 x 2.5" SATA		
	TPM	/	TPM 2.0	/
	Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset		
	Operation System	Windows 7 / 8 / 10 , Linux, Ubuntu	Windows 10 / 11 , Linux, Ubuntu	Windows 7 / 8 / 10 , Linux, Ubuntu
I/O	VIDEO	1 x H-DMI (Optional)		
	LAN	2 x SP13 Waterproof Giga LAN RJ45 Connector		
	USB	2 x SP13 Waterproof Connector For USB2.0		
	COM	1 x SP13 Waterproof Connector For COM		
	Wireless Network	Optional (WiFi / Bluetooth / 4G)		
	Other I/O Interface	1 x Power Switch		
Expansion	M.2	/	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	/
		/	1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)	/
		/	1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)	/
	mPCe	1 x mPCe (Wifi+BT+4G)	/	1 x mPCe (Wifi+BT+4G)
	SIM Socket	1x SIM Socket		


PanelPC Industriel Etanche



Coque en alliage d'aluminium
Ecran Capacitif PCAP / Résistif (Option)



LCD Size: 15" / 15.6" / 17" / 18.5" / 19" / 21.5" / 23.8" (Optional)

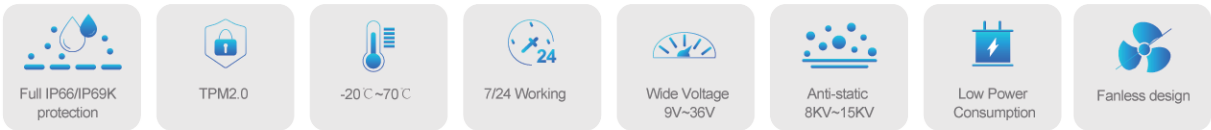

System	CPU	12th Gen Intel® Core™ i3-1215U 1.2GHz	12th Gen Intel® Core™ i5-1235U 1.3GHz	12th Gen Intel® Core™ i7-1255U 1.7GHz
	L2 Cache	10MB	12MB	12MB
	Graphics	Intel® UHD Graphics	Intel® Iris® Xe Graphics	Intel® Iris® Xe Graphics
	TDP	15W		
	System Chipset	Integrated with Intel® SoC		
	Memory	2 x DDR5 4800 MHz 8GB, Up to 64GB		
	Harddisk	1 x M.2 120G SSD (250G / 500G / 2TB SSD) / 1 x 2.5" SATA		
	Network	Intel® 226-V GbE LAN		
	Audio	Realtek ACL897 Audio controller		
	TPM	TPM 2.0		
I/O	Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset		
	Operation System	Windows 10 / 11 , Linux, Ubuntu		
	VIDEO	1 x H-DMI (Optional)		
	Ethernet	2 x SP13 Waterproof Giga LAN RJ45 Connector		
	USB	2 x SP13 Waterproof Connector For USB2.0		
	COM	1 x SP13 Waterproof Connector For COM		
Expansion	Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)		
	Other I/O Interface	1 x Power Switch		
	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)		
		1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)		
		1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)		
	SIM Socket	1x SIM Socket		

PanelPC Industriel Etanche



Coque en acier inoxydable SUS304 / SUS316
Ecran Capacitif PCAP / Résistif (Option)



LCD Size: 8.4" / 10.1" / 12.1" / 13.3" / 15" / 15.6" / 17" / 17.3" / 18.5" / 19" / 21.5" / 23.8" (Optional)



System	CPU	Intel® Celeron J1900 2.0GHz , TDP 10W	Intel® Celeron J6412 2.0GHz , TDP 10W	6th Gen Intel® Core i5-6200U 2.3GHz , TDP 15W
	L2 Cache	2MB	1.5MB	3MB
	Memory	1 x DDR3L 1333MHz 4GB, Up to 8GB	1 x DDR4L 3200MHz 4GB, MAX 32GB	1 x DDR4L 2133MHz 4GB, Up to 32GB
	Graphics	Intel HD Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors	Intel HD Graphics 520
	Network	Intel® 226-V GbE LAN		Intel® I211-AT GbE LAN
	Audio	Realtek ACL662 Audio controller	Realtek ACL897 Audio controller	Realtek ACL662 Audio controller
	Harddisk	1 x mSATA 128G SSD / (256G / 500G / 1TB SSD) optional		
	TPM	/	TPM 2.0	/
	Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset		
	Operation Sy stem	Windows 7 / 8 / 10 , Linux, Ubuntu	Windows 10 / 11、Linux, Ubuntu	Windows 7 / 8 / 10 , Linux, Ubuntu
I/O	VIDEO	1 x H-DMI (Optional)		
	LAN	2 x M12 Waterproof Giga LAN RJ45 Connector		
	USB	2 x M12 Waterproof Connector For USB2.0		
	COM	1 x M12 Waterproof Connector For COM		
	Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)		
	Other I/O Interface	1 x Power Switch		
Expansion	M.2	/	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	/
		/	1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)	/
		/	1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)	/
	mPCe	1 x mPCe (Wifi+BT+4G)	/	1 x mPCe (Wifi+BT+4G)
	SIM Socket	1x SIM Socket		


PanelPC Industriel Etanche



Coque en acier inoxydable SUS304 / SUS316
Ecran Capacitif PCAP / Résistif (Option)



LCD Size: 15" / 15.6" / 17" / 18.5" / 19" / 21.5" / 23.8" (Optional)

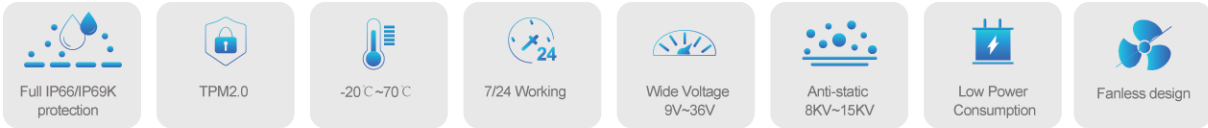

System	CPU	12th Gen Intel® Alder Lake Core™ i3-1215U 1.2GHz		12th Gen Intel® Alder Lake Core™ i5-1235U 1.3GHz
	L2 Cache	10MB		12MB
	Graphics	Intel® UHD Graphics		Intel® Iris® Xe Graphics
	TDP	15W		
	System Chipset	Integrated with Intel® SoC		
	Memory	2 x DDR5 4800 MHz 8GB, Up to 64GB		
	Harddisk	1 x M.2 128G SSD (250G / 500G / 2TB SSD)		
	Network	Intel® 226-V GbE LAN		
	Audio	Realtek ALC897 Audio controller		
	TPM	TPM 2.0		
	Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset		
Operation System	Windows 10 / 11 , Linux, Ubuntu			
I/O	VIDEO	1 x H-DMI (Optional)		
	Ethernet	2 x M12 Waterproof Giga LAN RJ45 Connector		
	USB	2 x M12 Waterproof Connector For USB2.0		
	COM	1 x M12 Waterproof Connector For COM		
	Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)		
	Other I/O Interface	1 x Power Switch		
Expansion	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)		
		1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)		
		1*M.2 (Key-M, 2280, NVMe / SATA, SSD)		
	SIM Socket	1x SIM Socket		


Panneau de contrôle



Conception sans ventilateur
Système de suspension léger (44-60)



Intel® Celeron® J1900 / Intel® Celeron® J6412 / 6th/7th Gen Intel® Core™ (Optional)

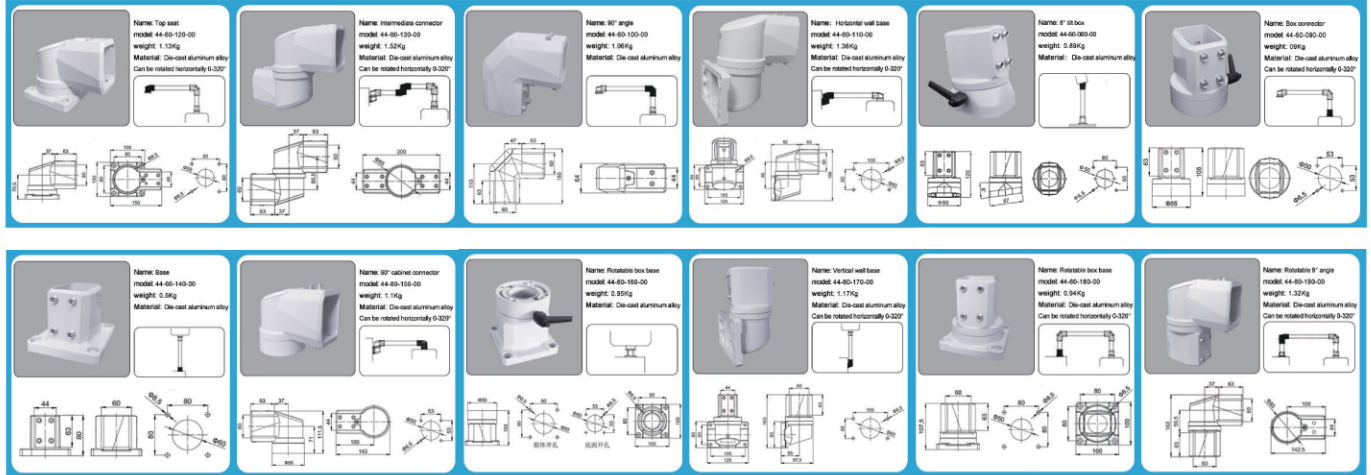

I/O	CPU	Intel® Celeron J1900	Intel® Celeron® J6412	6th/7th Gen Intel® Core™
	VIDEO	1 x VGA / 1 x H-DMI		
	Ethernet	2 x LAN 10/100/1000/2500 Mbps		
	USB	3 x USB2.0 / 1 x USB3.0	4 x USB 3.0	1 x USB2.0 / 2 x USB3.0
	Button	IDEC φ22 Select / Green / Red / Stop Button (optional)		
	Bracket kit	44- 60 Light Cantilever Accessories		
	Other I/O Interface	Optional (WiFi / Bluetooth / 4G /)		


Panneau de contrôle



Conception sans ventilateur
Système de suspension inox (Série 48)



8th/10th Gen Intel® Core™ / 12th/13th Gen Intel® Core™ (Optional)

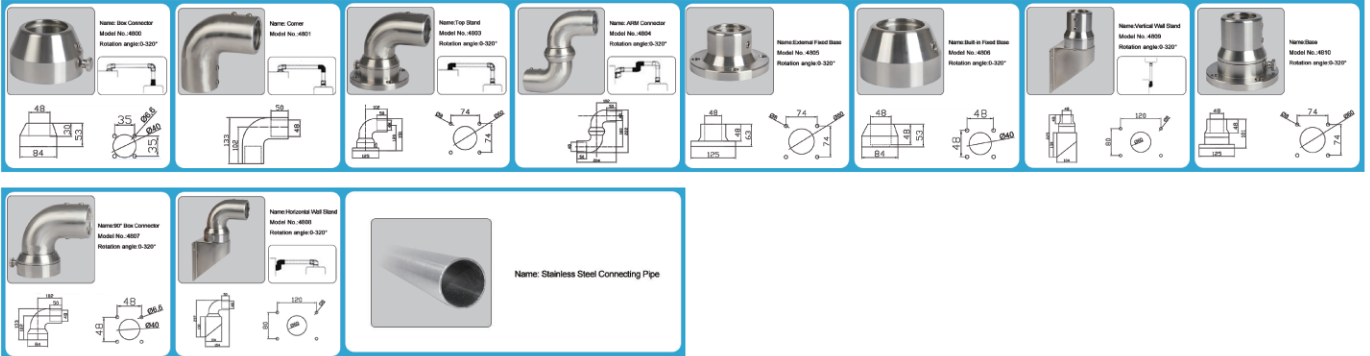

I/O	CPU	Intel® 8th Gen Core i3-8145U 2.1GHz / i5-8265U 1.6GHz / i7-8565U 1.8GHz	Intel® 12th Gen Core™ i3-1215U 1.2GHz / i5-1235U 1.3GHz / i7-1255U 1.7GHz
	VIDEO	1 x DP / 1 x H-DMI	2 x HD-MI
	Ethernet	2 x LAN 10/100/1000/2500 Mbps	2 x 2.5GbE / 1x 1GbE
	USB	1 x USB2.0 / 4 x USB3.0	4 x USB 3.2 Gen2
	Button	RAFI FS22+ Select / Green / Red / Stop Button (optional)	
	Bracket kit	Stainless Steel 48 Series	
	Other I/O Interface	Optional (WiFi / Bluetooth / 4G /)	
Expansion	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	
		1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)	
		1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)	
	Other I/O Interface	1x SIM Socket	

PC embarqué



Monolith-1000



Monolith-2000



Monolith-2012

Conception sans ventilateur
Coque en alliage d'aluminium

Intel® Celeron® J1900 / Intel® Celeron® J6412 / 6th/7th Gen Intel® Core™ / 8th/10th Gen Intel® Core™ / 12th/13th Gen Intel® Core™(Optional)

Stability performance

TPM2.0

-20℃~70℃

7/24 Working

Multiple I/Oports

Low Power Consumption

Fanless design

CPU	J1900	6th/7th Gen	8th/10th Gen
I/O			
VIDEO	1 x VGA / 1 x H-DMI	1 x DP / 1 x H-DMI	1 x DP / 1 x H-DMI
Ethernet	2 x LAN	2 x LAN	2 x LAN
USB	5 x USB2.0 / 1 x USB3.0	4 x USB2.0 / 2 x USB3.0	4 x USB2.0 / 4 x USB3.0
COM	4 x COM	4 x COM	4 x COM
Audio	1x Audio_out & Mic_in		
Wireless Network	Optional (WiFi / Bluetooth / 4G /5G)		

CPU	J6412
I/O	
VIDEO	1 x DP / 1 x H-DMI
Ethernet	3 x LAN
USB	6 x USB2.0 / 4 x USB3.0
COM	2 x COM
Audio	1x Audio_out & Mic_in
Wireless Network	Optional (WiFi / Bluetooth / 4G /5G)
Expansion	
M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)
	1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)
	1*M.2 (Key-M, 2280 SATA, SSD)
Expansion	1*mPCe
SIM Socket	1x SIM Socket

CPU	12th/13th Gen
I/O	
VIDEO	2 x HD-MI
Ethernet	3 x 2.5GbE / 1x 1GbE
USB	4 x USB 2.0 / 4 x USB 3.2 Gen2
COM	2 x COM
Audio	1x Audio_out & Mic_in
Wireless Network	Optional (WiFi / Bluetooth / 4G /5G)
Expansion	
M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)
	1*M.2 (Key-B, 3042/3052, PCIe / USB 3.0+USB2.0, 4G/5G)
	1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)
SIM Socket	1x SIM Socket

Windows

Linux

CE

FC

RoHS

K

PC embarqué



Monolith-2000



Monolith-2012



Monolith-2012

PC à montage sur rail DIN

Montage mural / Montage sur rail DIN pris en charge

Windows

Linux

CE

FC

RoHS

K

Intel® Celeron® J6412 / 12th/13th Gen Intel® Core™ (Optional)

Stability performance

TPM2.0

-20℃~70℃

7/24 Working

Multiple I/Oports

Low Power Consumption

System		
CPU	Intel® Elkhart Lake Celeron J6412 2.0GHz	12th Gen Intel® Core™ i3-1215U 1.2GHz / i5-1235U 1.3GHz / i7-1255U 1.7GHz
L2 Cache	1.5MB	10MB/12MB
TDP	10W	15W
System Chipset	Integrated with Intel® SoC	
Memory	DDR4L 3200MHz 4GB, MAX 32GB	DDR5 4800 MHz, Dual Channel SODIMM x 2, up to 64GB
Harddisk	1 x M.2 120G SSD (250G / 500G / 2TB SSD) / 1 x 2.5" SATA	
Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors	Intel® UHD Graphics / Intel® Iris® Xe Graphics
Network	Intel® 226-V GbE LAN	Intel® 226-V GbE LAN
Audio	Realtek ACL897 Audio controller	
TPM	TPM2.0	
Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset	
Operation System	Windows 10 / 11, Linux, Ubuntu	
I/O		
VIDEO	1 x DP / 1 x H-DMI	2 x HD-MI
Ethernet	3 x LAN 10/100/1000/2500 Mbps	2 x 2.5GbE / 1x 1GbE
USB	4 x USB3.0 / 2 x USB2.0	4 x USB 3.2 Gen2
COM	2 x RS-232 / 422 / 485 (Adjustable through BIOS)	2 x RS-232 / 422 / 485 (Adjustable through BIOS)
Audio	1x Audio_out & Mic_in	
Wireless Network	Optional (WiFi / Bluetooth / 4G /5G)	
Expansion		
M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	
	1*M.2 (Key-B, 3042/3052, PCIe / USB 3.0+USB2.0, 4G/5G)	
	1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)	
Expansion	1*mPCe	/
SIM Socket	1x SIM Socket	

PC embarqué



Monolith-6000

Ordinateur étanche
Coque en alliage d'aluminium



Intel® Celeron® J1900 / Intel® Celeron® J6412 / 6th/7th Gen Intel® Core™ / 8th/10th Gen Intel® Core™ (Optional)

Stability performance

TPM2.0

-20℃~70℃

7/24 Working

Full IP66/IP69K protection

Low Power Consumption

Fanless design

CPU	J1900	J6412	6th/7th Gen	8th/10th Gen	12th Gen
I/O					
VIDEO	1 x H-DMI				
Ethernet	2 x M12 Waterproof Giga LAN RJ45 Connector				
USB	2 x M12 Waterproof Connector For USB2.0				
COM	1 x M12 Waterproof Connector For COM				
Audio	1 x Audio_out & Mic_in				
Wireless Network	Optional (WiFi / Bluetooth / 4G /5G)				
Expansion					
M.2	/	1*M.2 (Key-E	/	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	
	/	1*M.2 (Key-B	/	1*M.2 (Key-B, 3042/3052, PCIe / USB 3.0+USB2.0, 4G/5G)	
	/	1*M.2 (Key-M	/	1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)	
Expansion	1*mPCe	/	1*mPCe	/	/
SIM Socket	1x SIM Socket				

Moniteur industriel



Coque en alliage d'aluminium
Ecran capacitif (PCAP) ou Résistif (Option)



LCD Size: 10.1" / 12.1" / 13.3" / 15" / 15.6" / 17" / 17.3" / 18.5" / 19" / 21.5" / 23.8" (Optional)

IP66 protection

-20℃~70℃

OVP / OCP / RPP

7/24 Working

Anti-static 8KV~15KV

Low Power Consumption

I/O	VGA	1 x VGA
	H-DMI	1 x H-DMI
	DVI	1 x DVI
	USB	1 x Touch USB
	Other I/O Interface	1 x OSD Control Key
Power	Power Adapter	1 x Optional AC/DC 12V/4A , 48W
	Power Input	2-pin Terminal Block Connector with Power Input 12~24VD
	Power Consumption	≤30W
Environment	Operating Temperature	-20~70°C (-4~158°F)
	Storage Temperature	-30~80°C (-22~176°F)
	Relative Humidity	5%~95%@40°C, non-condensing
	Vibration Protection	1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	IP Level	Front Panel IP66
	EMC	CE, FCC , Class A, ROHS, IEC / EN 62368-1

Moniteur industriel



Moniteur étanche
Ecran capacitif PCAP / Résistif (Option)



LCD Size: 12.1" / 15" / 17" / 19" / 21.5" / 23.8" (Optional)



I/O	Video	1 x Waterproof Connector For H-DMI / VGA (Optional)
	USB	1 x SP13 Waterproof Connector For Touch USB2.0
	Other I/O Interface	1 x Power Switch
Power	Power Adapter	1 x Optional AC/DC 12V/5A , 60W
	Power Input	1 x SP13 Waterproof Connector For 12V~24V DC
	Power Consumption	≤ 30W
Touch screen	Touch Type	Optical bonding PCAP Touch
	Surface Hardness	≥7H
Environment	Operating Temperature	-20~70°C (-4~158°F)
	Storage Temperature	-30~80°C (-22~176°F)
	Relative Humidity	5%~95%@40°C, non-condensing
	Vibration Protection	1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	IP Level	IP66 / IP69K
	EMC	CE, FCC , Class A, ROHS

Moniteur industriel



Moniteur en acier inoxydable
Ecran capacitif PCAP / Résistif (Option)



LCD Size: 12.1" / 13.3" / 15.6" / 21.5" (Optional)



I/O	Video	1 x Waterproof Connector For H-DMI / VGA (Optional)
	USB	1 x M12 Waterproof Connector For Touch USB2.0
	Other I/O Interface	1 x Power Switch
Power	Power Adapter	1 x Optional AC/DC 12V/5A , 60W
	Power Input	1 x M12 Waterproof Connector For 12V~24V DC
	Power Consumption	≤ 30W
Touch screen	Touch Type	Optical bonding PCAP Touch
	Surface Hardness	≥7H
Environment	Operating Temperature	-20~70°C (-4~158°F)
	Storage Temperature	-30~80°C (-22~176°F)
	Relative Humidity	5%~95%@40°C, non-condensing
	Vibration Protection	1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	IP Level	IP66 / IP69K
	EMC	CE, FCC , Class A, ROHS

Personnalisation



Interfaces :

Ports et boutons frontaux : USB, ON/OFF, etc

Fonctions :

NFC, RFID, Caméra IP, connectiques sur-mesure, etc

Affichage :

Ecran à collage optique, haute luminosité, anti-reflets, etc

Installation :

Base en porte-à-faux, montage en rack, VESA, etc

Personnalisation OEM :

Logo, BIOS, emballage personnalisé, gravure, etc

Certifications



Accessoires

Configuration des supports

Embarqué et VESA 100x100mm



Clips de fixation

Support pour moniteur

Support mural

Support mural à bras long

Support dédié étanche



Cable étanche SP13



Cable étanche M12




Alimentation et drivers

Solution



J1900	J6412	8th Gen / 10th Gen	12th Gen
10.1"~32"(Optional)			15"~23.8"(Optional)
J1900	J6412	8th Gen i3 i7, 10th Gen i5	i3 i5 i7
Windows 7 / 8 / 10, Linux, Ubuntu		Windows 10 / 11, Linux, Ubuntu	




Flexible Expansion for more I/O ports


Multiple I/O ports

Wide temperature range



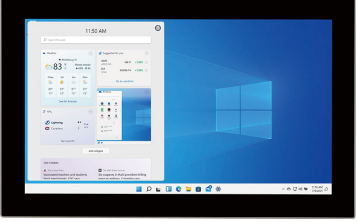

J1900	6th Gen	J6412	12th Gen
10.1"~23.8"(Optional)			15"~23.8"(Optional)
J1900	i5-6200U	J6412	i3 i5 i7
Windows 7 / 8 / 10, Linux, Ubuntu		Windows 10 / 11, Linux, Ubuntu	



Waterproof M12 / LP24 SP13 connection cable

Multiple I/O ports



Wide temperature range



Solution



J1900	6th Gen	J6412	8th Gen / 10th Gen	12th Gen
i5-6200U		J6412	8th Gen i3 i7, 10th Gen i5	i3 i5 i7
Windows 7 / 8 / 10, Linux, Ubuntu			Windows 10 / 11, Linux, Ubuntu	



Flexible Expansion for more I/O ports


Multiple I/O ports

Wide temperature range






J1900	6th Gen	J6412	8th Gen / 10th Gen	12th Gen
17" / 15.6" / 21.5"				
J1900	i5-6200U	J6412	8th i3 i7, 10th i5	i3 i5 i7
Windows 7 / 8 / 10, Linux, Ubuntu			Windows 10 / 11, Linux, Ubuntu	



Cantilever optional

Customization for specific I/O ports

Wide temperature range



Découvrez nos solutions



EVI - SAS au capital de 150 000€ - SIRET 79126097900012
Siège social : 4, avenue de l'Opéra, 75001 Paris, France
RCS PARIS 791 260 979 (2013 B 04464)
N° de TVA Intracommunautaire : FR16791260979
Convention exonération Copie France : 929.2503.004
Adhérent à un éco-organisme. IDU dans nos CGV.

23

Contactez nous

**Pour tous vos projets d'achats ou de conception,
nous nous tenons à votre disposition.**



Par e-mail :
contact@evi.biz
Réponse sous 24h



Par téléphone :
03 57 48 03 26
Numéro non surtaxé





A propos d'EVI

SAS au capital de 150 000€


Depuis 2008, EVI SAS conçoit et fabrique des solutions renforcées pensées pour les environnements les plus exigeants. Tablettes professionnelles, smartphones durcis et ordinateurs portables robustes : notre gamme allie solidité, fiabilité et performance pour répondre aux besoins du terrain.

Grâce à une expertise reconnue, nous développons des produits capables d'évoluer dans les conditions les plus contraignantes : chantiers, maintenance industrielle, logistique, transport ou encore hôtellerie. Conçus pour durer, nos équipements offrent une résistance certifiée aux chocs, aux vibrations, à l'humidité et aux températures extrêmes.

Disponibles en différentes tailles et formats, nos dispositifs renforcés intègrent les principaux systèmes d'exploitation (Android, Windows, Linux) afin de garantir une compatibilité optimale avec vos applications métiers.

Nous proposons un haut niveau de personnalisation matérielle et esthétique : ajout de modules spécifiques, intégration de vos outils métiers, marquage de votre logo. Notre engagement : vous fournir des solutions fiables, évolutives et adaptées à vos usages, avec la réactivité et la qualité qui caractérisent EVI SAS.

Siège social : 4, avenue de l'Opéra, 75001 Paris, FR

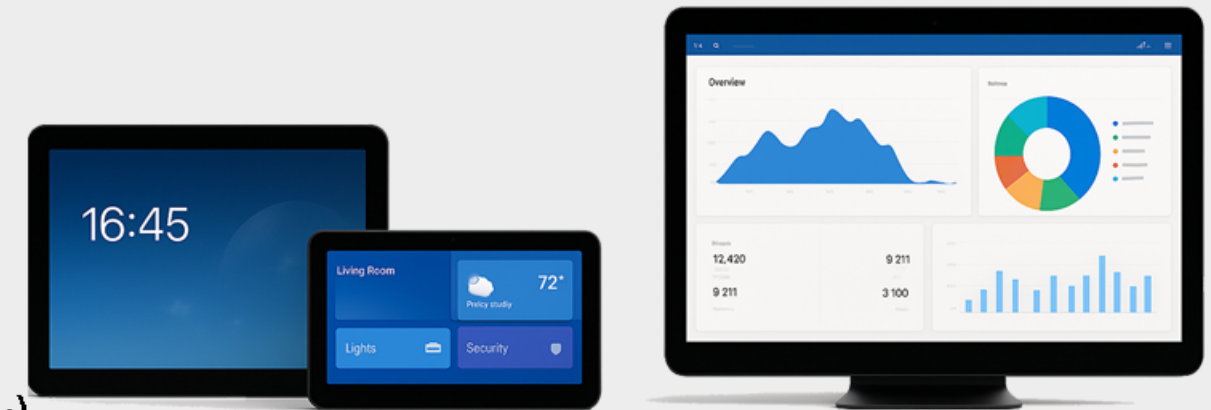



Pourquoi choisir EVI ?



Qualité française

Tous nos produits sont
conçus en France
dans notre centre R&D



Sérénité garantie

Garantie de 3 ans
incluse.
Echange à neuf
en cas de panne



Souplesse financière

Règlement possible
jusqu'à 60 jours



Compétitivité assurée

Des prix compétitifs
et des remises sur quantité
sans compromis sur la qualité

Un partenaire fiable, local, durable.



Tableau des remises

En cas d'achat en quantité, des remises peuvent s'appliquer :



Quantité commandée	Remise appliquée
1 à 9 unités	0%
10 à 49 unités	2.5%
50 à 99 unités	5%
100 à 249 unités	6.5%
Plus de 250 unités	Offre personnalisée, Nous contacter

Les remises sont automatiquement appliquées selon le volume commandé. Pour les projets spécifiques ou les besoins au-delà de 250 unités, notre équipe commerciale est à votre disposition pour établir une offre sur-mesure. Les remises s'entendent hors frais de transport.