



From Concept to Machine

The French Signature in Industrial PCs





CONTENTS



- Industrial Panel PC**-----03
- Aluminum Alloy Enclosure
 - 10.1"~32" Optional
 - Capacitive / Resistive Touch Optional
 - Front IP66 Waterproof



- Embedded Box PC**-----13
- Wall mounting /
 - DIN-Rail mounting supported
 - Full IP66 / IP69K Waterproof




- Waterproof Industrial PC**-----07
- SUS304 / SUS316 Aluminum Alloy Optional
 - 10.1"~32" Optional
 - Capacitive / Resistive Touch Optional
 - Full IP66 / IP69K Waterproof



- Industrial Monitor**-----16
- Aluminum Alloy Enclosure
 - 10.1"~24" Optional
 - Front IP66/ Full IP69K



- Device Control Panel**-----11
- Full Aluminum Alloy Structure
 - Available Sizes: 17", 15.6", 21.5"
 - Front IP66 Waterproof



- Customization**-----19
- Certifications**-----20
- Accessory**-----20
- Solution**-----21



Industrial Panel PC



Intel® Celeron® J1900
PCAP Touch / Resistive touch(Optional)



LCD Size: 10.1" / 12.1" / 13.3" / 15" / 15.6" / 17" / 17.3" / 18.5" / 19" / 21.5" / 23.8" (Optional)

IP66 protection

TPM2.0

-20 C ~70 C

OVP / OCP / RPP

7/24 Working

Wide Voltage
9V~36V

Anti-static
8KV~15KV

Low Power
Consumption

Fanless design

System	CPU	Intel® Bay Trail Celeron J1900 Quad-core 2.0GHz , TDP 10W
	L2 Cache	2MB
	System Chipset	Integrated with Intel® SoC
	Memory	1 x DDR3L 1333MHz 4GB, Up to 8GB
	Harddisk	1 x mSATA 128G SSD (250G / 500G / 1TB SSD) / 1 x 2.5" SATA
	Graphics	Intel HD Graphics
	Network	Intel® I211-AT GbE LAN
	Audio	Realtek ACL662 Audio controller
	TPM	TPM 2.0
	Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset
	Operation System	Windows 7 / 8 / 10, Linux, Ubuntu
I/O	VIDEO	1 x H-DMI
	LAN	2 x LAN (10/100/1000 Mbps)
	USB	3 x USB2.0 / 1 x USB3.0
	COM	2 x RS-232 / 422 / 485 (Adjustable through BIOS)
	Audio	1 x Audio_out & Mic_in
	Wireless Network	Optional (WiFi / Bluetooth / 4G)
Expansion	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)
		1*M.2 (Key-B, 3042, USB2.0, 4G)
	SIM Socket	1x SIM Socket

Industrial Panel PC



Intel® Celeron® J6412 /® Atom™ X6425E
PCAP Touch / Resistive touch(Optional)



LCD Size: 10.1" / 12.1" / 13.3" / 15" / 15.6" / 17" / 17.3" / 18.5" / 19" / 21.5" / 23.8" (Optional)

IP66 protection

TPM2.0

-20 C ~70 C

OVP / OCP / RPP

7/24 Working

Wide Voltage
9V~36V

Anti-static
8KV~15KV

Low Power
Consumption

Fanless design

System	CPU	Intel® Elkhart Lake Celeron J6412 2.0GHz , TDP 10W	Intel® Elkhart Lake Atom X6425E 2.0GHz , TDP 10W
	L2 Cache	1.5MB	
	System Chipset	Integrated with Intel® SoC	
	Memory	DDR4L 3200MHz 4GB, MAX 32GB	
	Harddisk	1 x M.2 120G SSD (250G / 500G / 2TB SSD) / 1 x 2.5" SATA	
	Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors	
	Network	Intel® 226-V GbE LAN	
	Audio	Realtek ACL897 Audio controller	
	TPM	TPM 2.0	
	Watchdog Timera	Software Programmable Supports 1~255 sec. System Reset	
	Operation System	Windows 10 / 11, Linux, Ubuntu	
I/O	VIDEO	1 x H-DMI	
	LAN	3 x LAN (10/100/1000/2500 Mbps)	
	USB	4 x USB 3.0	
	COM	2 x RS-232 / 422 / 485 (Adjustable through BIOS)	
	Audio	1x Audio_out & Mic_in	
	Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)	
Expansion	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	
		1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)	
		1*M.2 (Key-M, 2280, SATA / SSD)	
	SIM Socket	1x SIM Socket	


Industrial Panel PC



8th/10th Gen Intel® Core™
PCAP Touch / Resistive touch(Optional)



LCD Size: 10.1" / 12.1" / 13.3" / 15" / 15.6" / 17" / 17.3" / 18.5" / 19" / 21.5" / 23.8" / 31.5" (Optional)

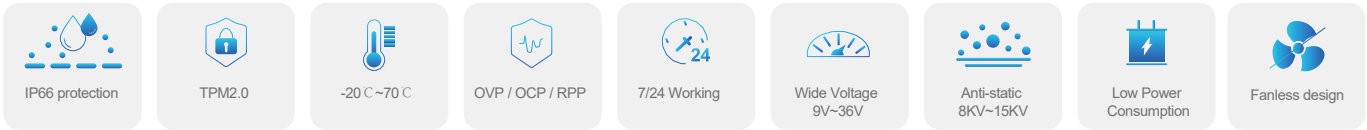

System	CPU	8th Gen Intel® Core™ i3-8145U 2.1GHz / i7-8565U 1.8GHz		10th Gen Intel® Core™ i5-10210U 1.6GHz
	L3 Cache	4MB / 8MB		6MB
	TDP	25W		
	System Chipset	Integrated with Intel® SoC		
	Memory	2 x DDR4L 2400MHz 4GB, Up to 64GB		
	Harddisk	1 x M.2 120G SSD (250G / 500G / 2TB SSD) / 1 x mSATA		
	Graphics	Intel HD Graphics 620		
	Network	Intel® I211-AT GbE LAN		
	Audio	Realtek ACL897 Audio controller		
	TPM	TPM 2.0		
	Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset		
	Operation System	Windows 10 / 11, Linux, Ubuntu		
I/O	VIDEO	1 x H-DMI		
	LAN	2 x LAN (10/100/1000 Mbps)		
	USB	3 x USB 3.0 / 1 x USB 2.0		
	COM	2 x RS-232 / 422 / 485 (Adjustable through BIOS)		
	Audio	1x Audio_out & Mic_in		
	Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)		
Expansion	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)		
		1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)		
	SIM Socket	1x SIM Socket		


Industrial Panel PC



12th/13th Gen Intel® Core™
PCAP Touch / Resistive touch(Optional)



LCD Size: 12.1" / 15" / 15.6" / 17" / 18.5" / 19" / 21.5" / 23.8" / 31.5" (Optional)

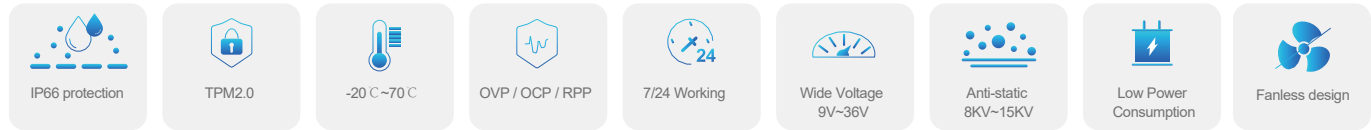

System	CPU	12th Generation Intel® Core™ i3-1215U 1.2GHz	12th Generation Intel® Core™ i5-1235U 1.3GHz	12th Generation Intel® Core™ i7-1255U 1.7GHz
	L3 Cache	10MB	12MB	12MB
	Graphics	Intel® UHD Graphics	Intel® Iris® Xe Graphics	Intel® Iris® Xe Graphics
	TDP	15W		
	System Chipset	Integrated With Intel® SoC		
	Memory	2 x DDR5 4800MHz 8GB, Up to 64GB		
	Harddisk	2 x M.2 120G SSD (250G / 500G / 2TB SSD)		
	Network	2 x Intel® I226, 2.5GbE / 1 x Intel® I219, 1GbE		
	Audio	Realtek ALC897 Audio controller		
	TPM	TPM 2.0		
	Watchdog Timer	255 Timer Levels, Set up by Software		
	Operation System	Windows 10 / 11, Linux, Ubuntu		
I/O	VIDEO	1 x H-DMI		
	Ethernet	3 x RJ45		
	USB	4 x USB 3.2 / 1 x Type-C x 1 (USB 3.0 Gen 2, DP 1.4)		
	COM	2 x RS-232 / 422 / 485 (Adjustable through BIOS)		
	Audio	1x Audio_out & Mic_in		
	Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)		
Expansion	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)		
		1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)		
		2*M.2 (Key-M, 2280, NVMe/ SATA, SSD)		
	SIM Socket	1x SIM Socket		

Waterproof Industrial PC



Aluminum Alloy Shell
PCAP Touch / Resistive touch(Optional)



LCD Size: 8.4" / 10.1" / 12.1" / 13.3" / 15" / 15.6" / 17" / 17.3" / 18.5" / 19" / 21.5" / 23.8" (Optional)

Full IP66/IP69K protection

TPM2.0

-20 C ~70 C

7/24 Working

Wide Voltage
9V~36V(12V~24V)

Anti-static
8KV~15KV

Low Power
Consumption

Fanless design

System	CPU	Intel® Celeron J1900 2.0GHz , TDP 10W	Intel® Celeron J6412 2.0GHz , TDP 10W	6th Gen Intel® Core i5-6200U 2.3GHz , TDP 15W
	L2 Cache	2MB	1.5MB	3MB
	Memory	1 x DDR3L 1333MHz 4GB, Up to 8GB	1 x DDR4L 3200MHz 4GB, MAX 32GB	1 x DDR4L 2133MHz 4GB, Up to 32GB
	Graphics	Intel HD Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors	Intel HD Graphics 520
	Network	Intel® 226-V GbE LAN		Intel® I211-AT GbE LAN
	Audio	Realtek ACL662 Audio controller	Realtek ACL897 Audio controller	Realtek ACL662 Audio controller
	Harddisk	1 x mSATA 128G SSD / (250G / 500G / 1TB SSD) / 1 x 2.5" SATA		
	TPM	/	TPM 2.0	/
	Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset		
	Operation System	Windows 7 / 8 / 10 , Linux, Ubuntu	Windows 10 / 11 , Linux, Ubuntu	Windows 7 / 8 / 10 , Linux, Ubuntu
I/O	VIDEO	1 x H-DMI (Optional)		
	LAN	2 x SP13 Waterproof Giga LAN RJ45 Connector		
	USB	2 x SP13 Waterproof Connector For USB2.0		
	COM	1 x SP13 Waterproof Connector For COM		
	Wireless Network	Optional (WiFi / Bluetooth / 4G)		
	Other I/O Interface	1 x Power Switch		
Expansion	M.2	/	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	/
		/	1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)	/
		/	1*M.2 (Key-M, 2280,NVMe/ SATA, SSD)	/
	mPCe	1 x mPCe (Wifi+BT+4G)	/	1 x mPCe (Wifi+BT+4G)
	SIM Socket	1x SIM Socket		

Waterproof Industrial PC



Aluminum Alloy Shell
PCAP Touch / Resistive touch(Optional)



LCD Size: 15" / 15.6" / 17" / 18.5" / 19" / 21.5" / 23.8" (Optional)

Full IP66/IP69K protection

TPM2.0

-20 C ~70 C

7/24 Working

Wide Voltage
9V~36V

Anti-static
8KV~15KV

Low Power
Consumption

Fanless design

System	CPU	12th Gen Intel® Core™ i3-1215U 1.2GHz	12th Gen Intel® Core™ i5-1235U 1.3GHz	12th Gen Intel® Core™ i7-1255U 1.7GHz
	L2 Cache	10MB	12MB	12MB
	Graphics	Intel® UHD Graphics	Intel® Iris® Xe Graphics	Intel® Iris® Xe Graphics
	TDP	15W		
	System Chipset	Integrated with Intel® SoC		
	Memory	2 x DDR5 4800 MHz 8GB, Up to 64GB		
	Harddisk	1 x M.2 120G SSD (250G / 500G / 2TB SSD) / 1 x 2.5" SATA		
	Network	Intel® 226-V GbE LAN		
	Audio	Realtek ACL897 Audio controller		
	TPM	TPM 2.0		
	Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset		
Operation System	Windows 10 / 11, Linux, Ubuntu			
I/O	VIDEO	1 x H-DMI (Optional)		
	Ethernet	2 x SP13 Waterproof Giga LAN RJ45 Connector		
	USB	2 x SP13 Waterproof Connector For USB2.0		
	COM	1 x SP13 Waterproof Connector For COM		
	Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)		
	Other I/O Interface	1 x Power Switch		
Expansion	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)		
		1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)		
		1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)		
	SIM Socket	1x SIM Socket		

Waterproof Industrial PC



SUS304/SUS316 Stainless Steel
PCAP Touch / Resistive touch(Optional)



LCD Size: 8.4" / 10.1" / 12.1" / 13.3" / 15" / 15.6" / 17" / 17.3" / 18.5" / 19" / 21.5" / 23.8" (Optional)

Full IP66/IP69K protection

TPM2.0

-20 C ~70 C

7/24 Working

Wide Voltage
9V~36V(12V~24V)

Anti-static
8KV~15KV

Low Power
Consumption

Fanless design

System	CPU	Intel® Celeron J1900 2.0GHz , TDP 10W	Intel® Celeron J6412 2.0GHz , TDP 10W	6th Gen Intel® Core i5-6200U 2.3GHz , TDP 15W
	L2 Cache	2MB	1.5MB	3MB
	Memory	1 x DDR3L 1333MHz 4GB, Up to 8GB	1 x DDR4L 3200MHz 4GB, MAX 32GB	1 x DDR4L 2133MHz 4GB, Up to 32GB
	Graphics	Intel HD Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors	Intel HD Graphics 520
	Network	Intel® 226-V GbE LAN		Intel® I211-AT GbE LAN
	Audio	Realtek ACL662 Audio controller	Realtek ACL897 Audio controller	Realtek ACL662 Audio controller
	Harddisk	1 x mSATA 128G SSD / (256G / 500G / 1TB SSD) optional		
	TPM	/	TPM 2.0	/
	Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset		
	Operation System	Windows 7 / 8 / 10 , Linux, Ubuntu	Windows 10 / 11 , Linux, Ubuntu	Windows 7 / 8 / 10 , Linux, Ubuntu
I/O	VIDEO	1 x H-DMI (Optional)		
	LAN	2 x M12 Waterproof Giga LAN RJ45 Connector		
	USB	2 x M12 Waterproof Connector For USB2.0		
	COM	1 x M12 Waterproof Connector For COM		
	Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)		
	Other I/O Interface	1 x Power Switch		
Expansion	M.2	/	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	/
		/	1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)	/
		/	1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)	/
	mPCe	1 x mPCe (Wifi+BT+4G)	/	1 x mPCe (Wifi+BT+4G)
	SIM Socket	1x SIM Socket		

Waterproof Industrial PC



SUS304/SUS316 Stainless Steel
PCAP Touch / Resistive touch(Optional)



LCD Size: 15" / 15.6" / 17" / 18.5" / 19" / 21.5" / 23.8" (Optional)

Full IP66/IP69K protection

TPM2.0

-20 C ~70 C

7/24 Working

Wide Voltage
9V~36V

Anti-static
8KV~15KV

Low Power
Consumption

Fanless design

System	CPU	12th Gen Intel® Alder Lake Core™ i3-1215U 1.2GHz	12th Gen Intel® Alder Lake Core™ i5-1235U 1.3GHz
	L2 Cache	10MB	12MB
	Graphics	Intel® UHD Graphics	Intel® Iris® Xe Graphics
	TDP	15W	
	System Chipset	Integrated with Intel® SoC	
	Memory	2 x DDR5 4800 MHz 8GB, Up to 64GB	
	Harddisk	1 x M.2 128G SSD (250G / 500G / 2TB SSD)	
	Network	Intel® 226-V GbE LAN	
	Audio	Realtek ALC897 Audio controller	
	TPM	TPM 2.0	
I/O	Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset	
	Operation System	Windows 10 / 11 , Linux, Ubuntu	
	VIDEO	1 x H-DMI (Optional)	
	Ethernet	2 x M12 Waterproof Giga LAN RJ45 Connector	
	USB	2 x M12 Waterproof Connector For USB2.0	
	COM	1 x M12 Waterproof Connector For COM	
	Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)	
Expansion	Other I/O Interface	1 x Power Switch	
	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	
		1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)	
		1*M.2 (Key-M, 2280, NVMe / SATA, SSD)	
	SIM Socket	1x SIM Socket	


Device Control Panel



Fanless design
44-60 Lightweight Suspension System



Intel® Celeron® J1900 / Intel® Celeron® J6412 / 6th/7th Gen Intel® Core™ (Optional)

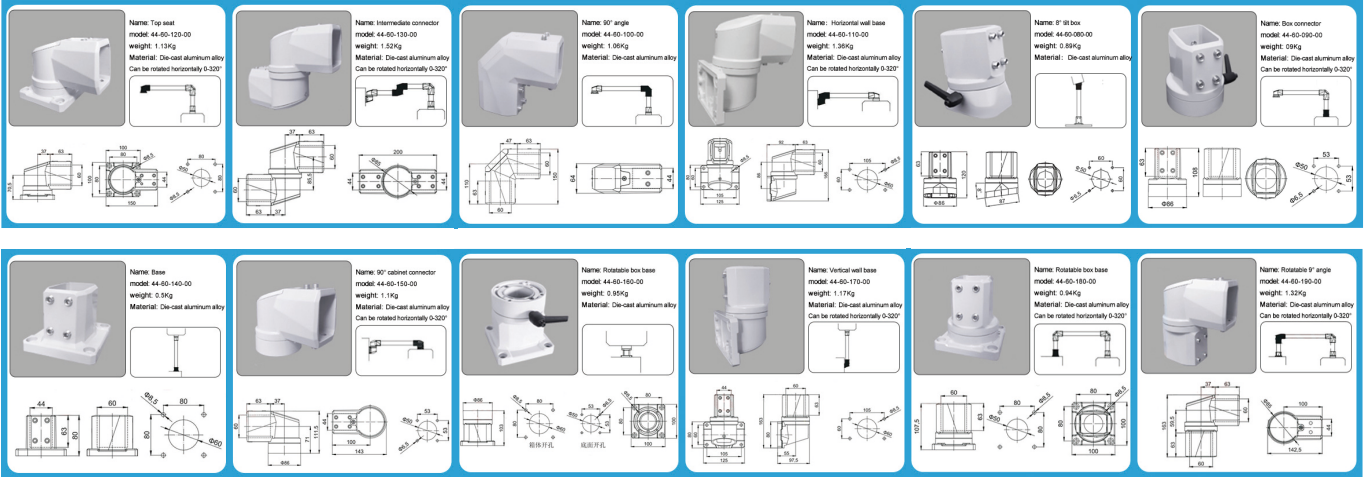

I/O	CPU	Intel® Celeron J1900	Intel® Celeron® J6412	6th/7th Gen Intel® Core™
	VIDEO	1 x VGA / 1 x H-DMI		
	Ethernet	2 x LAN 10/100/1000/2500 Mbps		
	USB	3 x USB2.0 / 1 x USB3.0	4 x USB 3.0	1 x USB2.0 / 2 x USB3.0
	Button	IDEC φ22 Select / Green / Red / Stop Button (optional)		
	Bracket kit	44- 60 Light Cantilever Accessories		
	Other I/O Interface	Optional (WiFi / Bluetooth / 4G /)		


Device Control Panel



Fanless design
Stainless Steel 48 Series Suspension System



8th/10th Gen Intel® Core™ / 12th/13th Gen Intel® Core™ (Optional)

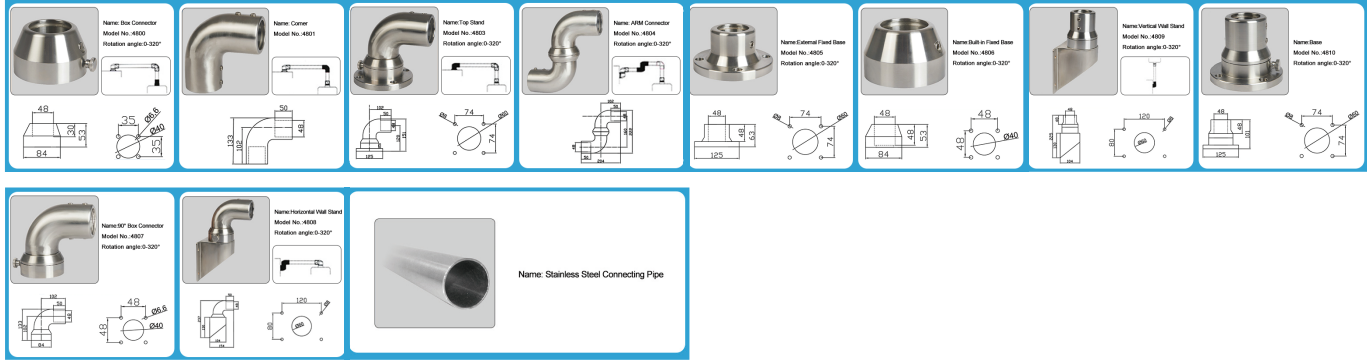

I/O	CPU	Intel® 8th Gen Core	Intel® 12th Gen Core™
	VIDEO	i3-8145U 2.1GHz / i5-8265U 1.6GHz / i7-8565U 1.8GHz	i3-1215U 1.2GHz / i5-1235U 1.3GHz / i7-1255U 1.7GHz
	Ethernet	2 x DP / 1 x H-DMI	
	USB	2 x LAN 10/100/1000/2500 Mbps	
	Button	1 x USB2.0 / 4 x USB3.0	
	Bracket kit	RAFI FS22+ Select / Green / Red / Stop Button (optional)	
	Other I/O Interface	Stainless Steel 48 Series	
Expansion	M.2	Optional (WiFi / Bluetooth / 4G /)	
		1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	
		1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)	
	Other I/O Interface	1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)	
		1x SIM Socket	

Embedded Box PC



Monolith-1000



Monolith-2000



Monolith-2012

Fanless design
Aluminum Alloy Shell

Intel® Celeron® J1900 / Intel® Celeron® J6412 / 6th/7th Gen Intel® Core™ / 8th/10th Gen Intel® Core™ / 12th/13th Gen Intel® Core™(Optional)

Stability performance

TPM2.0

-20℃~70℃

7/24 Working

Multiple I/Oports

Low Power Consumption

Fanless design



CPU	J1900	6th/7th Gen	8th/10th Gen
I/O			
VIDEO	1 x VGA / 1 x H-DMI	1 x DP / 1 x H-DMI	1 x DP / 1 x H-DMI
Ethernet	2 x LAN	2 x LAN	2 x LAN
USB	5 x USB2.0 / 1 x USB3.0	4 x USB2.0 / 2 x USB3.0	4 x USB2.0 / 4 x USB3.0
COM	4 x COM	4 x COM	4 x COM
Audio	1x Audio_out & Mic_in		
Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)		

CPU	J6412
I/O	
VIDEO	1 x DP / 1 x H-DMI
Ethernet	3 x LAN
USB	6 x USB2.0 / 4 x USB3.0
COM	2 x COM
Audio	1x Audio_out & Mic_in
Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)
Expansion	
M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)
	1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)
	1*M.2 (Key-M, 2280 SATA, SSD)
Expansion	1*mPCe
SIM Socket	1x SIM Socket

CPU	12th/13th Gen
I/O	
VIDEO	2 x HD-MI
Ethernet	3 x 2.5GbE / 1x 1GbE
USB	4 x USB 2.0 / 4 x USB 3.2 Gen2
COM	2 x COM
Audio	1x Audio_out & Mic_in
Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)
Expansion	
M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)
	1*M.2 (Key-B, 3042/3052, PCIe / USB 3.0+USB2.0, 4G/5G)
	1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)
SIM Socket	1x SIM Socket

Embedded Box PC



Monolith-2000



Monolith-2012



Monolith-2012

DIN-rail mounting PC
Wall mounting/DIN-rail mounting supported



Intel® Celeron® J6412 / 12th/13th Gen Intel® Core™ (Optional)

Stability performance

TPM2.0

-20℃~70℃

7/24 Working

Multiple I/Oports

Low Power Consumption

System		
CPU	Intel® Elkhart Lake Celeron J6412 2.0GHz	12th Gen Intel® Core™ i3-1215U 1.2GHz / i5-1235U 1.3GHz / i7-1255U 1.7GHz
L2 Cache	1.5MB	10MB/12MB
TDP	10W	15W
System Chipset	Integrated with Intel® SoC	
Memory	DDR4L 3200MHz 4GB, MAX 32GB	DDR5 4800 MHz, Dual Channel SODIMM x 2, up to 64GB
Harddisk	1 x M.2 120G SSD (250G / 500G / 2TB SSD) / 1 x 2.5" SATA	
Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors	Intel® UHD Graphics / Intel® Iris® Xe Graphics
Network	Intel® 226-V GbE LAN	Intel® 226-V GbE LAN
Audio	Realtek ACL897 Audio controller	
TPM	TPM2.0	
Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset	
Operation System	Windows 10 / 11, Linux, Ubuntu	
I/O		
VIDEO	1 x DP / 1 x H-DMI	2 x HD-MI
Ethernet	3 x LAN 10/100/1000/2500 Mbps	2 x 2.5GbE / 1x 1GbE
USB	4 x USB3.0 / 2 x USB2.0	4 x USB 3.2 Gen2
COM	2 x RS-232 / 422 / 485 (Adjustable through BIOS)	2 x RS-232 / 422 / 485 (Adjustable through BIOS)
Audio	1x Audio_out & Mic_in	
Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)	
Expansion		
M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	
	1*M.2 (Key-B, 3042/3052, PCIe / USB 3.0+USB2.0, 4G/5G)	
	1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)	
Expansion	1*mPCe	/
SIM Socket	1x SIM Socket	

Embedded Box PC



Monolith-6000

Waterproof Edge computers
Aluminum Alloy Shell



Intel® Celeron® J1900 / Intel® Celeron® J6412 / 6th/7th Gen Intel® Core™ / 8th/10th Gen Intel® Core™ (Optional)

Stability performance

TPM2.0

-20℃~70℃

7/24 Working

Full IP66/IP69K protection

Low Power Consumption

Fanless design

CPU	J1900	J6412	6th/7th Gen	8th/10th Gen	12th Gen
I/O					
VIDEO	1 x H-DMI				
Ethernet	2 x M12 Waterproof Giga LAN RJ45 Connector				
USB	2 x M12 Waterproof Connector For USB2.0				
COM	1 x M12 Waterproof Connector For COM				
Audio	1 x Audio_out & Mic_in				
Wireless Network	Optional (WiFi / Bluetooth / 4G /5G)				
Expansion					
M.2	/	1*M.2 (Key-E	/	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	
	/	1*M.2 (Key-B	/	1*M.2 (Key-B, 3042/3052, PCIe / USB 3.0+USB2.0, 4G/5G)	
	/	1*M.2 (Key-M	/	1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)	
Expansion	1*mPCe	/	1*mPCe	/	/
SIM Socket	1x SIM Socket				

Industrial Monitor



Aluminum alloy panel
PCAP Touch / Resistive touch(Optional)



LCD Size: 10.1" / 12.1" / 13.3" / 15" / 15.6" / 17" / 17.3" / 18.5" / 19" / 21.5" / 23.8" (Optional)

IP66 protection

-20℃~70℃

OVP / OCP / RPP

7/24 Working

Anti-static 8KV~15KV

Low Power Consumption

I/O	VGA	1 x VGA
	H-DMI	1 x H-DMI
	DVI	1 x DVI
	USB	1 x Touch USB
	Other I/O Interface	1 x OSD Control Key
Power	Power Adapter	1 x Optional AC/DC 12V/4A , 48W
	Power Input	2-pin Terminal Block Connector with Power Input 12~24VD
	Power Consumption	≤30W
Environment	Operating Temperature	-20~70°C (-4~158°F)
	Storage Temperature	-30~80°C (-22~176°F)
	Relative Humidity	5%~95%@40°C, non-condensing
	Vibration Protection	1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	IP Level	Front Panel IP66
	EMC	CE, FCC , Class A, ROHS, IEC / EN 62368-1

Industrial Monitor



Waterproof Monitor
PCAP Touch / Resistive touch(Optional)



LCD Size: 12.1" / 15" / 17" / 19" / 21.5" / 23.8" (Optional)

Full IP66/IP69K protection

-20℃~70℃

OVP / OCP / RPP

7/24 Working

Anti-static 8KV~15KV

Low Power Consumption

I/O	Video	1 x Waterproof Connector For H-DMI / VGA (Optional)
	USB	1 x SP13 Waterproof Connector For Touch USB2.0
	Other I/O Interface	1 x Power Switch
Power	Power Adapter	1 x Optional AC/DC 12V/5A , 60W
	Power Input	1 x SP13 Waterproof Connector For 12V~24V DC
	Power Consumption	≦30W
Touch screen	Touch Type	Optical bonding PCAP Touch
	Surface Hardness	≥7H
Environment	Operating Temperature	-20~70°C (-4~158°F)
	Storage Temperature	-30~80°C (-22~176°F)
	Relative Humidity	5%~95%@40°C, non-condensing
	Vibration Protection	1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	IP Level	IP66 / IP69K
	EMC	CE, FCC, Class A, ROHS

Industrial Monitor



Stainless Steel Display
PCAP Touch / Resistive touch(Optional)



LCD Size: 12.1" / 13.3" / 15.6" / 21.5" (Optional)

Full IP66/IP69K protection

-20℃~70℃

OVP / OCP / RPP

7/24 Working

Anti-static 8KV~15KV

Low Power Consumption

I/O	Video	1 x Waterproof Connector For H-DMI / VGA (Optional)
	USB	1 x M12 Waterproof Connector For Touch USB2.0
	Other I/O Interface	1 x Power Switch
Power	Power Adapter	1 x Optional AC/DC 12V/5A , 60W
	Power Input	1 x M12 Waterproof Connector For 12V~24V DC
	Power Consumption	≦30W
Touch screen	Touch Type	Optical bonding PCAP Touch
	Surface Hardness	≥7H
Environment	Operating Temperature	-20~70°C (-4~158°F)
	Storage Temperature	-30~80°C (-22~176°F)
	Relative Humidity	5%~95%@40°C, non-condensing
	Vibration Protection	1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	IP Level	IP66 / IP69K
	EMC	CE, FCC, Class A, ROHS

Customization



- Interfaces:
- Front USB port , Front On/Off switch

- Functions:
- NFC , RFID , IP camera , High brightness , Optical bonding screen , Anti-glare screen

- Installation:
- rack moun , cantilever base

- OEM:
- LOGO , BIOS , Carton

Certifications



Accessory

- Bracket Configuration
- Embedded and VESA 100mm x 100mm Mounting




- Configuration
- Resistive Touch Computer Includes Stylus Pen



Solution



J1900	J6412	8th Gen / 10th Gen	12th Gen
10.1"~32"(Optional)			15"~23.8"(Optional)
J1900	J6412	8th Gen i3 i7, 10th Gen i5	i3 i5 i7
Windows 7 / 8 / 10, Linux, Ubuntu		Windows 10 / 11, Linux, Ubuntu	




Flexible Expansion for more I/O ports


Multiple I/O ports

Wide temperature range



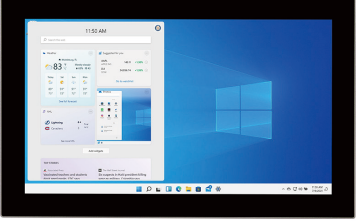

J1900	6th Gen	J6412	12th Gen
10.1"~23.8"(Optional)			15"~23.8"(Optional)
J1900	i5-6200U	J6412	i3 i5 i7
Windows 7 / 8 / 10, Linux, Ubuntu		Windows 10 / 11, Linux, Ubuntu	



Waterproof M12 / LP24 SP13 connection cable


Multiple I/O ports

Wide temperature range



Solution





Flexible Expansion for more I/O ports

Multiple I/O ports


Wide temperature range

J1900	6th Gen	J6412	8th Gen / 10th Gen	12th Gen
J1900	i5-6200U	J6412	8th Gen i3 i7, 10th Gen i5	i3 i5 i7
Windows 7 / 8 / 10, Linux, Ubuntu			Windows 10 / 11, Linux, Ubuntu	






J1900	6th Gen	J6412	8th Gen / 10th Gen	12th Gen
17" / 15.6" / 21.5"				
J1900	i5-6200U	J6412	8th i3 i7, 10th i5	i3 i5 i7
Windows 7 / 8 / 10, Linux, Ubuntu			Windows 10 / 11, Linux, Ubuntu	




Cantilever optional

Customization for specific I/O ports

Wide temperature range



Solution

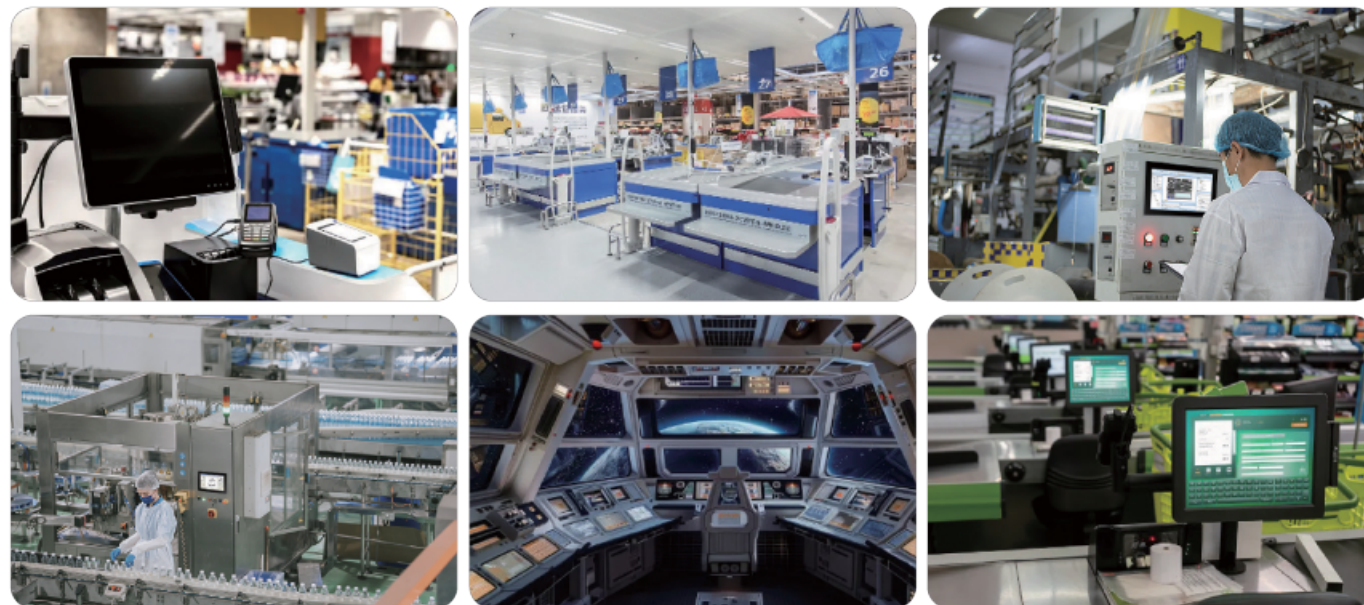

EVI – French simplified joint-stock company (SAS) with a share capital of €150,000

SIRET: 791 260 979 00012

**Registered office: 4, avenue de l'Opéra, 75001 Paris, France
Trade Register (RCS) Paris: 791 260 979 (2013 B 04464)**

EU VAT number: FR 16791260979

Copie France exemption agreement: 929.2503.004

Contact us

**Looking to buy or design a custom solution?
Our team is ready to help.**



By e-mail:

contact@evi.biz

Get a reply in less than 24 hours



By phone:

00-33 3 57 48 03 26

Standard-rate number





About us


French joint-stock company with a share capital of €150,000

Since 2008, EVI SAS has established itself as a key player in the design of touchscreen solutions that combine innovation, performance, and adaptability. Specializing in the research, development, and manufacturing of custom tech products, we offer a wide range of devices — from smart home tablets to integrated industrial POE touch panels, touchscreen monitors, and digital signage solutions.

With over 16 years of experience, EVI delivers tailored OEM/ODM solutions to meet the unique requirements of each client — from simple interfaces to highly complex systems. Our products, available in sizes ranging from 4 to 65 inches, are built to integrate seamlessly into the most demanding professional environments. We offer maximum flexibility — both in hardware and software — with a wide selection of processors (Rockchip, MTK, Intel, AMD, Snapdragon) and operating systems (Android, Linux Ubuntu/Debian, Windows).


Our experienced engineering team has deep expertise across a broad range of development environments (BSP, SDK, C#, Python, QT, Java), ensuring full compatibility and optimal performance. At EVI, we believe that technology should serve real-world use. That's why our dedicated team supports you at every stage: delivering reliable, responsive, and customized solutions to help you succeed.

Head office: 4, avenue de l'Opéra, 75001 Paris, France

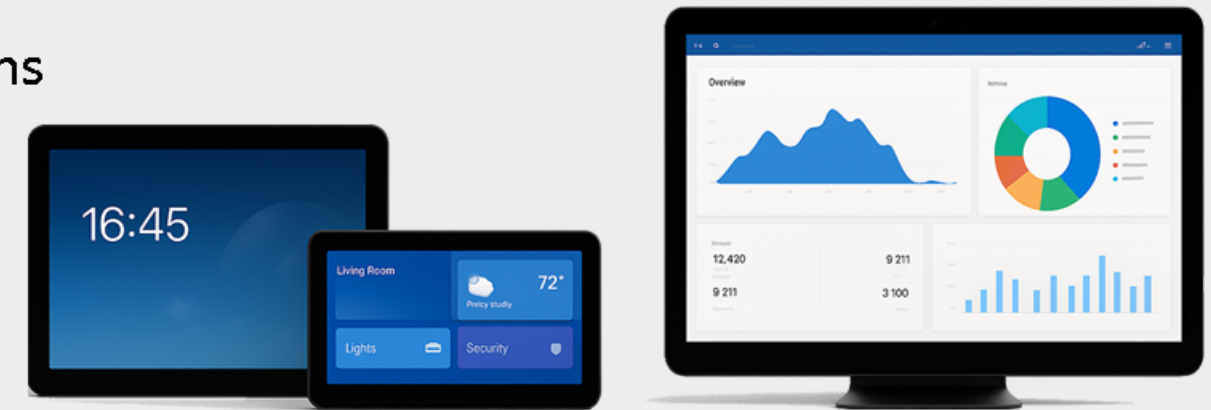



What makes EVI the right choice?

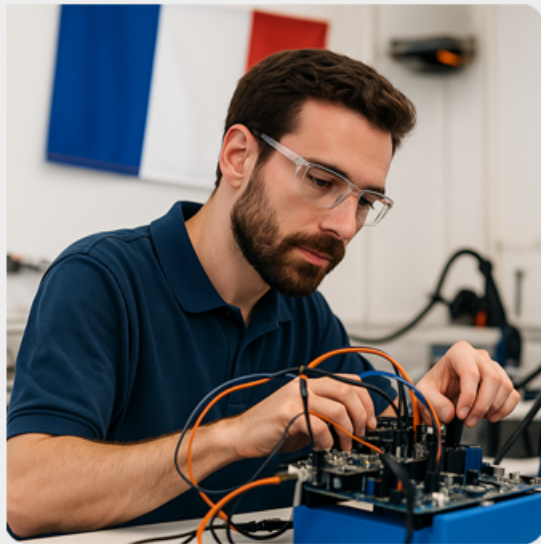

Made with French Expertise

All our products are designed in France at our R&D center



Your Peace of Mind, Our Commitment

Enjoy a 3-Year Warranty.
Full replacement with a new Unit in case of breakdown



Flexible payment Options

60-Day Payment Option available



Outstanding value and Competitiveness

Get the best of both worlds: great prices, bulk discounts, and uncompromised quality.

Your Trusted Global and Sustainable Partner



Volume Discount Chart

Enjoy exclusive discounts on bulk orders.

Quantity Ordered	Discount Applied
1 to 9 units	No Discount
10 to 49 units	2.5% off
50 to 99 units	5% off
100 to 249 units	6.5% off
250+ units	Custom Offer – Contact Us

Discounts are automatically applied based on order volume.

For specific projects or requirements exceeding 250 units, our sales team is available to provide a tailored quote.

All discounts are calculated excluding shipping costs.